










78.2E

IN	78.2E.1.230.241x U_N (110...240)V AC (50/60 Hz)/DC $U_{min} - U_{max}$ 88 – 265 V AC (50/60 Hz) $U_{min} - U_{max}$ 90 – 275 V DC $P < 2.8$ W (@ 88 V)
OUT	- [IN 230 V AC, (-20...+40)°C] 10.8 A (max 25 A – 5 ms) 24 V DC, 250 W - [IN (88...275)V, 50°C] I_N 10 A, 24 V DC, 240 W
	(-20...+70)°C
IP20	

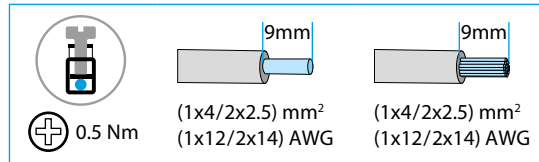

Installation Environmental Conditions

- Open Type Equipment - Pollution Degree-2 Installation Environment
- Maximum Surrounding Air Temperature 40°C
- Use 60°C/75°C copper (CU) conductor and wire ranges No. 14-18 AWG, stranded or solid
- The terminal tightening torque of 0.5 Nm

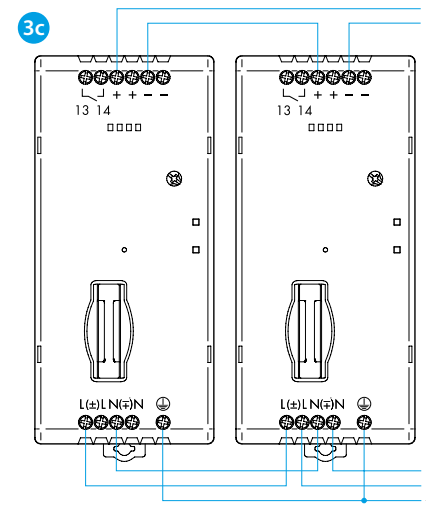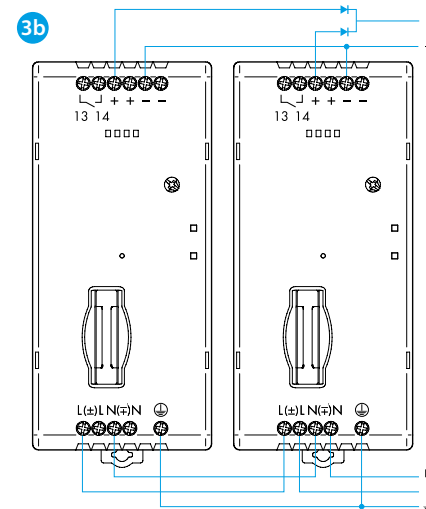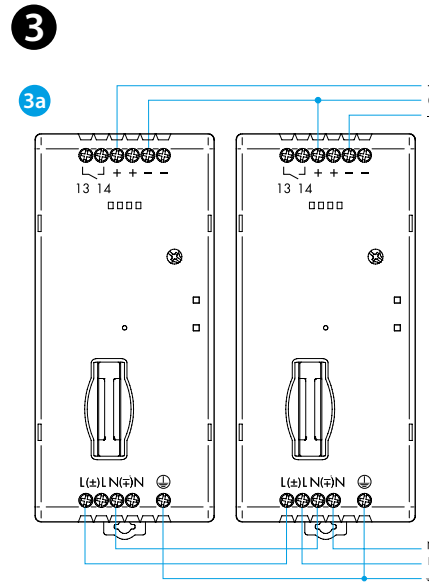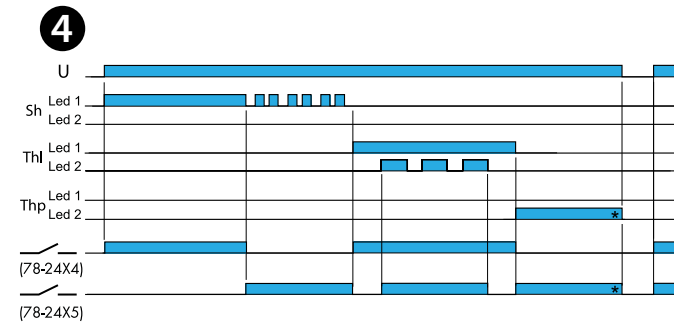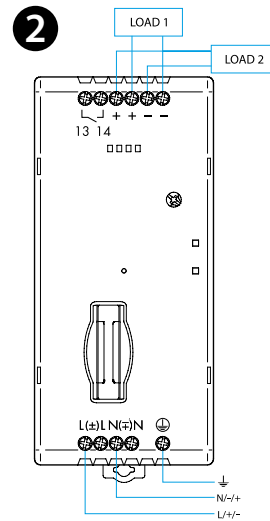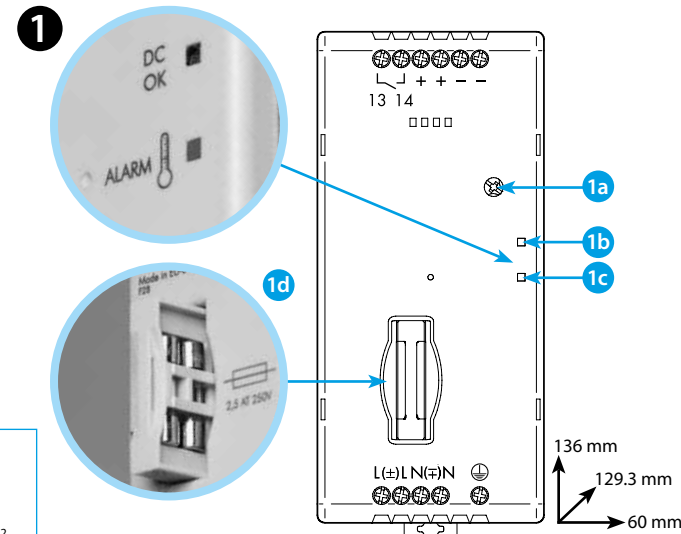

ENGLISH

78.2E SWITCH MODE POWER SUPPLIE

1 DIMENSIONS / FRONT VIEW

- 1a Nominal output voltage 24 V DC adjustable between 24 and 28 V
- 1b Green LED: Indication of output status
- 1c Red LED: Thermal protection with warning and alarm
- 1d Fuse protection of input supply (plus spare)

2 CONNECTIONS

3 WIRING DIAGRAM EXAMPLES

- 3a Dual connection - for a Bipolar supply
- 3b Parallel connection ($I \leq 2 \times I_N$)
- 3c Series connection - for increased output voltage

4 LED INDICATION AND FUNCTION

- U AC/DC Supply
- Sh Short circuit
- Thl Thermal limit
- Thp Thermal protection *(to reset, remove the supply)
- Led1 (1b) LED Green
- Led2 (1c) LED Red

NOTE

- Efficiency: 93% @ 230 V AC
- Automatic short circuit protection
- Thermal protection with warning and alarm, via LED and auxiliary contact
- Two-stage power conversion with active PFC (Power Factor Correction)
- Fuse: 3.15A-T
- **78.2E.1.230.2414**: Positive safety logic contact. Make output contact opens if the relay detects an error. This version is suitable, for example, for signalling to a remote PLC all those alarms representing a service interruption of the power supply output
- **78.2E.1.230.2415** Pre-alarm contact. The NO contact (13-14) closes when an anomaly happens (short circuit, thermal limit, thermal protection)
- **The product can be used without particular wiring requirements, but, to ensure compliance with EN 61204-3: 2019, the length of the connection cables between the output terminals and the load must not exceed 30 m**

