




finder[®]
SWITCH TO THE FUTURE

“LUMOS” LED緊急照明燈

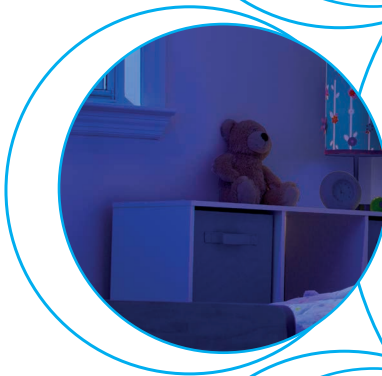

1L
系列



緊急照明燈



“LUMOS” LED緊急照明燈

類型 1L.10

– 壁嵌安裝

- 符合CEI 64-8
- 標稱電壓：230 V AC (50/60) Hz
- 可充電電池
- 電池續航時間2.5小時
- 現代設計
- 與3個模塊外殼兼容壁嵌式安裝，包含用於以下框架的適配器：
 - Ave series S44
 - BTicino series Axolute
 - BTicino series Living
 - BTicino series Living Light
 - BTicino series Living Light Air
 - BTicino series Matix
 - Gewiss series Chorus
 - Gewiss series System
 - Simon Urmet Nea
 - Vimar series Eikon
 - Vimar series Idea
 - Vimar series Arkè
 - Vimar Plana
- 白色或黑色版本

1L.10
螺絲終端



如需輪廓圖，請參閱第4頁

技術資料

光通量	流明	14
效能	流明/瓦	67
電池充滿電時間	小時	72
最長照明時間（假設電池充滿電）	小時	2.5
色溫	k	5700
電源供應規格		
標稱電壓 (U _N)	V AC (50/60 Hz)	110...230
操作範圍	V AC (50/60 Hz)	88...264
功耗	瓦	0.2
技術資料		
環境溫度範圍	° C	- 10...+50
防護等級		IP 20
認證（根據類型）		CE


1L.10




- 緊急照明燈模塊在照明電源故障時啟動

訂購資訊

範例：12系列，LED緊急照明燈，電源230VAC。

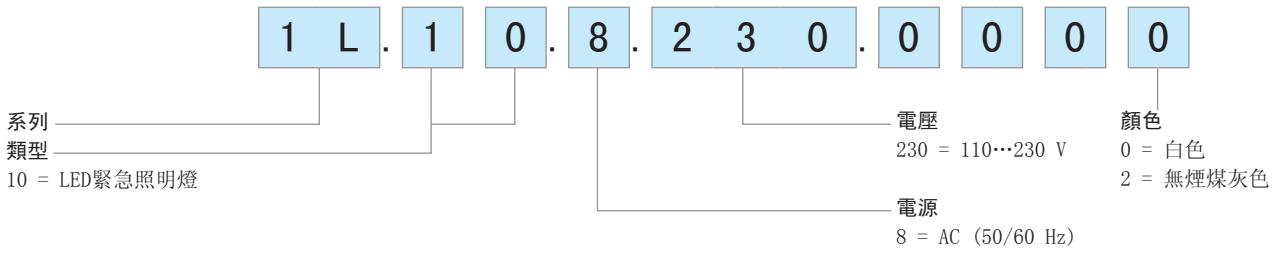


接線圖


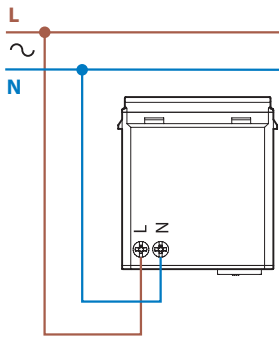


投入服務


完成配接後，在組裝回壁盒之前，將選擇器從0切換至1。
照明燈在電源斷電時打開，並在電源正常供應時關閉。



極線圖

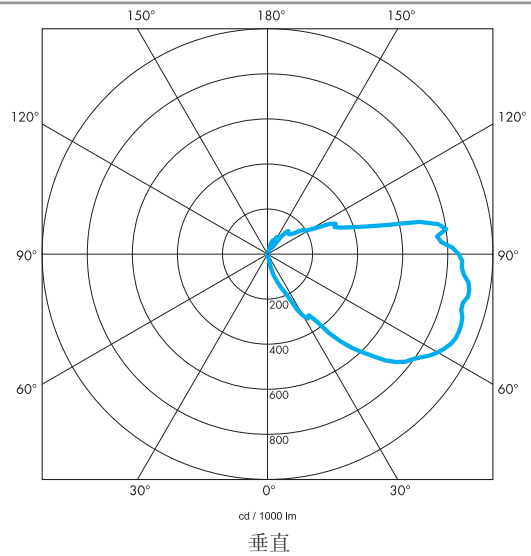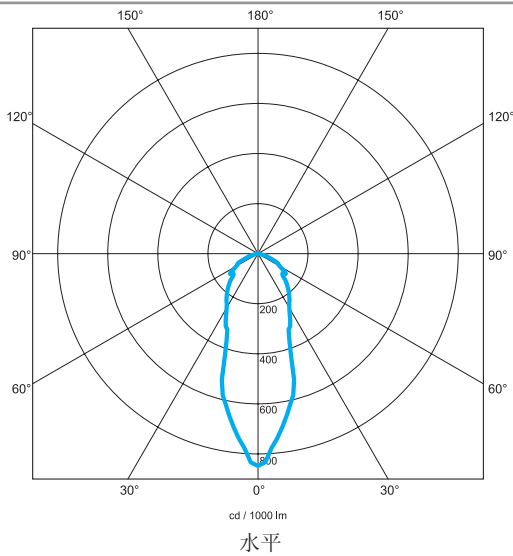

適配器

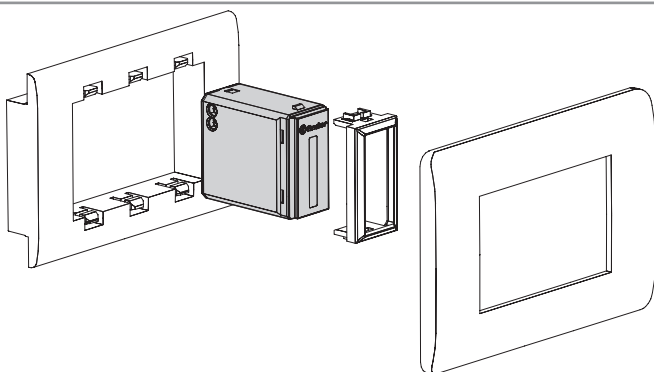

輪廓圖

